

ICOM

NEW IDAS SERIES

VHF DIGITAL HANDHELD TRANSCEIVERS

IC-F3400DT/DS/D

UHF DIGITAL HANDHELD TRANSCEIVERS

IC-F4400DT/DS/D

VHF DIGITAL MOBILE TRANSCEIVERS

IC-F5400D/DS

UHF DIGITAL MOBILE TRANSCEIVERS

IC-F6400D/DS

LOOK SMART, WORK SMART



IDASTM
ICOM DIGITAL ADVANCED SYSTEM

NXDNTM

Photo includes optional antennas.

IDAS™ Takes You To a New Level of “Smart”

Introducing ICOM's new generation of IDAS digital business radios. This smart new series incorporates cutting edge design, superb performance and a comprehensive range of sophisticated features all on a flexible, upgradable multi-protocol platform.

Icom manufacturing refinements and enhancements have not only reduced the size of the radios but have provided new functions and enhanced performance. The electrical and industrial hardware improvements provide an adaptable radio solution for your organisation that is easy to use whatever the working environment you may be operating in.

Icom's product quality is legendary. Look smart and work smart with the new IDAS series.




Small, Slim and Smart

New engineering techniques including the use of a custom SoC (System-on-a-Chip) and flat sheet keypad have made radios body as compact as possible. The slim dimensions are also supplemented with reduced power consumption, allowing for a thinner battery pack.



High-Resolution Color LCD

The high-resolution transreflective colour LCD provides great visibility in both natural and indoor lighting. Functions and menu items are clearly labelled with easy to read. A night mode LCD setting is available for use at night or in low lighting conditions.

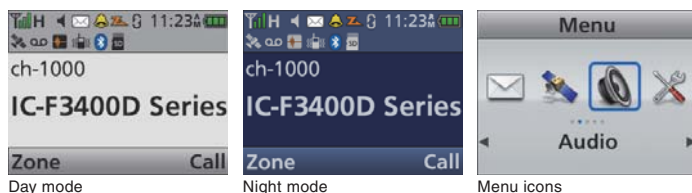

Multiple Languages

Functions and menu items can be shown in local languages including English, French, German, Spanish, Russian and Simplified Chinese fonts. In addition, voice announcements can be recorded and changed for output in these languages.



License Key Upgrade

The radios functions and protocols can be upgraded and customized to meet your specific needs with various license key options.



NXDN™ Trunking Upgrade

The radios are compatible with IDAS digital conventional mode and analogue FM mode with auto sensing function. The radios can be upgraded to NXDN Type-D multi-site trunking mode with a license key.



DES/AES Encryption with OTAR

For digital communication security, the radios provide basic 4-key DES encryption as standard. When used with the optional UT-134 encryption unit, 256-bit AES encryption and the OTAR function are available. The OTAR function allows updating of encryption keys over the radio channel.



OTAP and OAA

For efficiency in radio programming, the OTAP (Over-the-Air-Programming) function allows remote change of programming data (for example adding a new repeater) over the radio channel. The OAA (Over-the-Air-Alias) function sends user name over the radio channel and eliminates needs to program the alias table. Successfully manage your fleet with ease.



Built-in Bluetooth®

The built-in Bluetooth module provides remote operation and hands-free communication paired with a third-party Bluetooth headset*. When connected with Bluetooth telemetric devices or PC terminals, data or files can be wirelessly transferred.

* Available functions depend on paired Bluetooth devices.



Digital Voice Recording

The radios can record incoming and outgoing communications, and replay recorded communications. When a 32 GB microSD* card is used, a Max. 500 hours recording is possible. The recorded audio is saved in “wav” format and allows replay on the radio or a PC.

* MicroSD card is required separately.



Motion/Stationary Detection Sensors

An emergency button and five emergency-related functions are incorporated (man down, motion detection, stationary detection, lone worker and power OFF emergency functions). The motion/stationary sensor sensitivity level is programmable in 10 levels for each function.

* Man down, motion detection and stationary detection for handheld radios only.



GPS Receiver

Position data can be sent with voice call or status call and can be used with an AVL (Automatic Vehicle Location) system. The GPS log functions log user position data at regular intervals and can be saved to a microSD card. The radios can show direction and distance to another radio or specified point, and notify you with a beep sound if the target is in the specified range.

* For mobile radios, an optional GPS antenna, UX-241, is required separately.



USB Port for PC Connection

The radios can be connected to a PC through a USB port for programming and accessing the installed microSD card in mass storage mode.



Transparent Data Modem Facility

The radios can be used as a transparent data modem which transmits various data at 9600 bps over the radio channel using 12.5 kHz channel spacing. Text messages can send up to 100 characters text data message and scrolls the received message on the display.



ANC (Active Noise Canceling)

The ANC assists in providing clear comment. Some specified noise sources (such as sirens or boiler noise) can be cancelled.



Audio Equalizer

The Audio equalizer allows you to tailor the audio tone to suit speech characteristics and the language in use. Five types of tone controls are available (flat, high boost, middle boost, low boost and low cut). The audio auto gain control function controls the speech audio to a constant, regardless of the input magnitudes of the voice or distance of the microphone from the mouth.



Voice Announcement

The radios can notify channel number, zone and channel type with voice announcement. This function is convenient for making radio adjustments without having to look at the radio.



Vibration Alert

When a call from a specific user is received, the hand-held radio will vibrate enough to be felt through heavy clothing. Vibration patterns are programmable.



Waterproof and Dusttight with AquaQuake™ Function

The handheld radios in this range are IP68 waterproof and dust-tight protection (1m depth for 1 hour). They also incorporate an AquaQuake draining function by emitting a vibrating buzz sound.



Multiple Controller Configurations

With a combination with optional separation kits, COMMANDMIC and separation cables, three types of controller configurations are available to suit almost any application or installation that may be required. The intercom function is available between controllers and/or COMMANDMIC.



Detached Controller*
Optional RMK-5
and separation cable required.

A detached controller head with the separated RF unit is a simple to install in almost any vehicle.



Dual Head Controller*
Optional RMK-7, hand microphone
and separation cables required.

Suitable for double cab vehicles. Install the controller head to front and rear seats respectively.



COMMANDMIC™ and Detached Controller*
Optional RMK-5, COMMANDMIC, HM-218
and separation cables required.

The COMMANDMIC is handy for installing a work platform on the rear part of the vehicle.

* Detached Controller, Dual head and COMMANDMIC configurations are for IC-F5400D/IC-F6400D only.

General Features

- 136–174MHz, 380–470MHz wide frequency coverage
- 1024 memory channels with 128 zones
- 32 memory channels (IC-F3400D series only)
- IP55 jet water resistant and dust-protection (Mobile radios)
- MIL-STD rugged construction
- 14-pin ACC connector with BTL amplifier output (Handheld radios)
- D-SUB 25-pin ACC connector with programmable functions (Mobile radios)
- Built-in 20W audio amplifier for connecting with external public address system (Mobile radios)
- VOX (Voice Operated transmission) function
- Internal clock
- High-speed scanning for Voting and multi-site operation
- Tactical group function for temporary regroup user groups with optional zone copy cable
- Normal, priority and voting scan

IDAS™ Features

- IDAS conventional and multi-site conventional
- Type-D single-site trunking and multi-site trunking*
- 6.25kHz and 12.5kHz channel spacing
- Analogue/Digital conventional mixed mode operation
- Status • Text message
- Call alert • Radio check
- Radio Stun/Revive/Kill
- Remote monitor

* Type-D multi-site trunking is a license key upgrade option.

Analogue FM Mode Features

- 2-tone, 5-tone, CTCSS and DTCS built-in
- DTMF autodial and DTMF decode
- MDC 1200 compatible
- BIIS 1200 Compatible
- Basic LTR™ trunking
- Audio compander
- Inversion voice scrambler

Supplied accessories for handheld radios:

- (May differ or not supplied according to version)
- Battery pack, BP-283 • Belt clip, MB-133

Supplied accessories for mobile radios:

- (May differ or not supplied according to version)
- Hand microphone, HM-221 • DC power cable
 - Mounting bracket kit • Microphone hanger

SPECIFICATIONS

	IC-F3400DT/DS/D IC-F4400DT/DS/D	IC-F5400D/DS IC-F6400D/DS
GENERAL		
Frequency range	136–174MHz 380–470MHz	136–174MHz 380–470MHz
Number of channels	1024 channels /128 zones (IC-F3400DT/DS) 32 channels/2 zones (IC-F3400D)	1024 channels /128 zones
Type of emission (Varies according to version)	16K0F3E, 14K0F3E, 8K50F3E, 8K30F1E/D, 4K00F1E/D	16K0F3E, 14K0F3E, 8K50F3E, 8K30F1E/D, 4K00F1E/D
Channel spacing (Varies according to version)	25/20/12.5 kHz (Analogue) 12.5/6.25 kHz (Digital)	25/20/12.5 kHz (Analogue) 12.5/6.25 kHz (Digital)
Antenna impedance	50Ω	50Ω (BNC)
Power supply requirements	7.5V DC	13.2V DC
Current drain (approx.)		
Tx High	1.5A /1.8A (VHF/UHF)	5.0A typ.
Rx Max. audio/Stand-by	550mA/140mA	0.8A typ./270mA typ.
Operating temperature range	–30°C to +60°C	–30°C to +60°C
Dimensions (W×H×D) (Projections not included)	53.6×123.5×29.3 mm (With BP-283)	174×55×176 mm
Weight (approx.)	170g (main unit without battery pack and antenna)	1.5 kg
TRANSMITTER		
Output power	5W	25W
Frequency error	±1.0ppm	±1.0ppm
Spurious emissions	0.25μW (≤1GHz), 1.0μW (>1GHz)	0.25μW (≤1GHz), 1.0μW (>1GHz)
Maximum deviation (Analogue)	±5.0/±4.0/±2.5 kHz (W/M/N)	±5.0/±4.0/±2.5 kHz (W/M/N)
Audio harmonic distortion	0.5% typ. (@ AF 1kHz 40% deviation)	0.5% typ. (@ AF 1kHz 40% deviation)
FSK error (Digital)	1% typ.	1% typ.
RECEIVER		
Sensitivity	–4dBμV emf. typ. –11/–6dBμV emf. typ. (D 12.5/D 6.25)	–4dBμV emf. typ. –11/–6dBμV emf. typ. (D 12.5/D 6.25)
Adjacent channel selectivity	Analogue 76/76/68dB typ. (W/M/N) Digital 65/65dB typ. (D 12.5/D 6.25)	75/75/71dB typ. (W/M/N) 65/65dB typ. (D 12.5/D 6.25)
Spurious response	80dB typ.	85dB typ.
Intermodulation	67dB typ.	70dB typ.
Audio output power	Internal SP 0.8W typ. (@5% distortion with 12Ω) External SP 0.9W typ. (@5% distortion with 8Ω)	4.0W typ. (@5% distortion with 4Ω) 4.0W typ. (@5% distortion with 4Ω)

Measurements made in accordance with EN300 086, EN301 166, EN300 113.
All stated specifications are subject to change without notice or obligation.

Applicable U.S. Military Specifications & IP Rating

Standard	MIL 810G	
	Method	Procedure
Low Pressure	500.5	I, II
High Temperature	501.5	I, II
Low Temperature	502.5	I, II
Temperature Shock	503.5	I
Solar Radiation	505.5	I
Rain Blowing/Drip	506.5	I, III
Humidity	507.5	–
Salt Fog	509.5	–
Dust Blowing	510.5	I
Immersion*	512.5	I
Vibration	514.6	I
Shock	516.6	I, IV

Also meets equivalent MIL-STD-810-C, -D, -E and -F.

* IC-F3400DT/DS/D, IC-F4400DT/DS/D only.

Ingress Protection Standard

IC-F3400DT/DS/D, IC-F4400DT/DS/D	IP68 (Dust-tight and waterproof protection)
IC-F5400D/DS, IC-F6400D/DS	IP55 (Dust-protection and jet water resistance)



PRODUCTS LINEUP

Handheld Radios



Top view



VHF DIGITAL TRANSCEIVER
IC-F3400DT
UHF DIGITAL TRANSCEIVER
IC-F4400DT



VHF DIGITAL TRANSCEIVER
IC-F3400DS
UHF DIGITAL TRANSCEIVER
IC-F4400DS



VHF DIGITAL TRANSCEIVER
IC-F3400D
UHF DIGITAL TRANSCEIVER
IC-F4400D



Mobile Radios

VHF DIGITAL TRANSCEIVER
IC-F5400D
UHF DIGITAL TRANSCEIVER
IC-F6400D



VHF DIGITAL TRANSCEIVER
IC-F5400DS
UHF DIGITAL TRANSCEIVER
IC-F6400DS



OPTIONS FOR Handheld Radios

Some options may not be available in some countries. Please ask your dealer for details.

BATTERY PACKS



BP-283 BP-284

Battery packs	Type	Capacity	Operating time*
BP-283	Li-ion 7.2V	2010mAh (typ.) 1910mAh (min.)	10 hours (Approx.)
BP-284	Li-ion 7.2V	3210mAh (typ.) 3070mAh (min.)	16 hours (Approx.)

* Tx: Rx: standby = 5:5:90 duty cycle. Power save function ON.

RAPID CHARGER



BC-123S** BC-219

Charges the BP-283/BP-284 in 3/4.5 hours (approx.) respectively.

** BC-123SA for USA, SE for Europe, SV for Australia.

MULTI-CHARGER



BC-214 BC-157S

Charges up to six BP-283/BP-284 battery packs in 3/4.5 hours (approx.) respectively.

SPEAKER-MICROPHONE



HM-222

HEADSETS and PTT SWITCH CABLE



HS-94
Hook type

HS-95
Behind-the-head type

HS-97
Throat type

VS-4MC
Required when using any of these headsets

CIGARETTE LIGHTER CABLE & POWER SUPPLY CABLES



CP-23L
For use with BC-219

OPC-515L
For use with BC-219

OPC-656
For use with BC-214

ACC ADAPTOR



AD-118
For use with Hirose Plug Accessory

AES/DES ENCRYPTION UNIT



UT-134

ZONE COPY CABLES



OPC-1870
Handheld to handheld cable

OPC-2362
Handheld to mobile cable

LEATHER BELT HANGERS



MB-96N

MB-96F

MB-96FL

BELT CLIPS



MB-133
Alligator type

MB-136
Swivel type

LEATHER CASES



LC-184
For IC-F3400D/DS, F4400D/DS

LC-186
For IC-F3400D, F4400D

ANTENNAS

- FA-S81V: 136-150MHz
- FA-S82V: 148-160MHz
- FA-S83V: 160-174MHz
- FA-S81U: 380-430MHz
- FA-S82U: 430-480MHz

CUT ANTENNAS

- FA-S67VC: 136-174MHz
- FA-S76UC: 380-520MHz

STUBBY ANTENNAS

- FA-S81VS: 136-150MHz
- FA-S82VS: 150-160MHz
- FA-S83VS: 160-174MHz
- FA-S81US: 400-450MHz
- FA-S82US: 450-490MHz

CHARGER ADAPTER

- AD-132 for BP-283/BP-284
AD-132 charger adapter is supplied with the BC-214, depending on BC-214's version.

OPTIONS FOR Mobile Radios

Some options may not be available in some countries. Please ask your dealer for details.

HAND MICROPHONES



HM-220
Heavy duty microphone

HM-220T
Heavy duty microphone with DTMF keypad

HM-221

HM-221T
DTMF microphone

DESKTOP MICROPHONE



SM-29

EXTERNAL SPEAKERS



SP-30
20W rated input

SP-35: 2m cable
SP-35L: 6m cable

ZONE COPY CABLE



OPC-2362
Mobile to handheld cable

SEPARATION KIT

RMK-5
For detached controller configuration. Options for IC-F5400D/F6400D only.

DUAL-HEAD SEPARATION KIT

RMK-7
Separation kit and secondary controller for dual head configuration. Options for IC-F5400D/F6400D only.

COMMANDMIC™



HM-218

Secondary remote control microphone for RMK-5. Options for IC-F5400D/F6400D only.

SEPARATION CABLES for RMK-5 or RMK-7

- OPC-2364: 1.9m; 6.2ft
- OPC-2365: 3m; 9.8ft
- OPC-2366: 5m; 16.4ft
- OPC-2367: 8m; 26.2ft

SEPARATION CABLES for HM-218, COMMANDMIC

- OPC-2373: 1.9m; 6.2ft
- OPC-2374: 8m; 26.2ft

Separation cable is required for use with detached controller head or COMMANDMIC separately.

GPS ANTENNA



UX-241

AES/DES ENCRYPTION UNIT



UT-134

RMK-5, RMK-7, HM-218, UT-134 and separation cables will be available later. OTAP, OTAR, audio equalizer, BISS, Chinese fonts and some functions will be available with future firmware upgrade.

Icom, Icom Inc. and Icom logo are registered trademarks of Icom Incorporated (Japan) in Japan, the United States, the United Kingdom, Germany, France, Spain, Russia, Australia, New Zealand and/or other countries. IDAS, the IDAS logo, AQUAQUAKE and COMMANDMIC are registered trademarks or trademarks of Icom Incorporated. NXDN is a trademark of Icom Incorporated and JVC KENWOOD Corporation. LTR is a trademark of the E.F. Johnson Technologies, Inc. The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Icom Inc. is under license.

Icom Inc.

1-1-32, Kami-minami, Hirano-Ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013

www.icom.co.jp/world

Count on us!

Icom America Inc.

12421 Willows Road NE,
Kirkland, WA 98034, U.S.A.
Phone: +1 (425) 454-9155
Fax: +1 (425) 454-1509
E-mail: sales@icomamerica.com
URL: <http://www.icomamerica.com>

Icom (Europe) GmbH

Communication Equipment
Auf der Krautweide 24
65812 Bad Soden am Taunus, Germany
Phone: +49 (6196) 76685-0
Fax: +49 (6196) 76685-50
E-mail: info@icomeurope.com
URL: <http://www.icomeurope.com>

Icom France s.a.s.

Zac de la Plaine,
1 Rue Brindejone des Moulinais, BP 45804,
31505 Toulouse Cedex 5, France
Phone: +33 (5) 61 36 03 03
Fax: +33 (5) 61 36 03 00
E-mail: icom@icom-france.com
URL: <http://www.icom-france.com>

Asia Icom Inc.

6F No. 68, Sec. 1 Cheng-Teh Road,
Taipei, Taiwan, R.O.C.
Phone: +886 (02) 2559 1899
Fax: +886 (02) 2559 1874
E-mail: sales@asia-icom.com
URL: <http://www.asia-icom.com>

Your local distributor/dealer:

Icom Canada

Glenwood Centre #150-6165
Highway 17A, Delta, B.C.,
V4K 5B8, Canada
Phone: +1 (604) 952-4266
Fax: +1 (604) 952-0090
E-mail: info@icomcanada.com
URL: <http://www.icomcanada.com>

Icom Spain S.L.

Ctra. Rubi, No. 88 "Edificio Can Castanyer"
Bajos A 08174, Sant Cugat del Valles,
Barcelona, Spain
Phone: +34 (93) 590 26 70
Fax: +34 (93) 589 04 46
E-mail: icom@icomspain.com
URL: <http://www.icomspain.com>

Icom (Australia) Pty. Ltd.

Unit 1 / 103 Garden Road,
Clayton, VIC 3168 Australia
Phone: +61 (03) 9549 7500
Fax: +61 (03) 9549 7505
E-mail: sales@icom.net.au
URL: <http://www.icom.net.au>

Shanghai Icom Ltd.

No.101, Building 9, Caifuxingyuan Park,
No.188 Maoting Road, Chedun Town,
Songjiang District, Shanghai, 201611, China
Phone: +86 (021) 6153 2768
Fax: +86 (021) 5765 9987
E-mail: bjicom@bjicom.com
URL: <http://www.bjicom.com>

Icom Brazil

Rua Iitoró, 444 Padre Eustáquio
Belo Horizonte MG,
CEP: 30720-450, Brazil
Phone: +55 (31) 3582 8847
Fax: +55 (31) 3582 8987
E-mail: sales@icombrasil.com

Icom (UK) Ltd.

Blacksole House, Altira Park,
Herne Bay, Kent, CT6 6GZ, U.K.
Phone: +44 (0) 1227 741741
Fax: +44 (0) 1227 741742
E-mail: info@icomuk.co.uk
URL: <http://www.icomuk.co.uk>

Icom New Zealand

39C Rennie Drive, Airport Oaks,
Auckland, New Zealand
Phone: +64 (09) 274 4062
Fax: +64 (09) 274 4708
E-mail: inquiries@icom.co.nz
URL: <http://www.icom.co.nz>